NOVELLINI / SHOWER TRAYS / WET ROOMS

WET ROOMS

TOTAL SOULTION FOR TIMBER AND CONCRETE FLOORS.





WET ROOMS

What is a Wetroom?

At Novellini we understand that you desire something more individual than just a shower room. That's why we've created a comprehensive wetroom and glass collection that features a range of both stylish and practical solutions for your home.

Our wetrooms offer all the benefits of a walk-in shower, combined with the protection offered by a shower screen or enclosure, allowing you to create a contemporary, luxurious feel to any bathroom.

Using the available space in an efficient and uncluttered manner allows you to create a truly individual showering experience, limited only by your imagination.

Peace of Mind

Our designers and engineers work with one common goal: to design and manufacture wetroom solutions that are fully integrated. From the hidden technology under the wetroom floor, to our beautifully designed glass screens and enclosures.

Lifetime Guarantee

All of our wetroom products are covered by the Novellini Product Lifetime Guarantee. Our guarantee is valid only if used with Novellini products and does not cover installation.

The Complete Package

We offer wetroom solutions for both timber and concrete floors with all systems encompassing the four key components of a wetroom:


- **1** Gradient
- 2 Drainage
- 3 Waterproofing
- 4 Glass







Choosing your floor style The secret to a successful wetroom

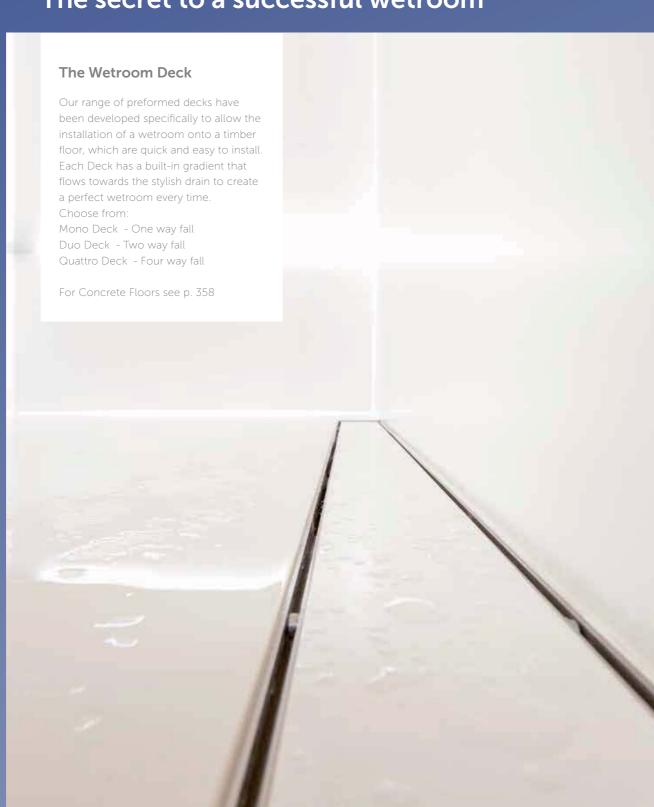



Mono Deck - One way fall for large format tiles




Benefits of the Mono Deck

The Mono Deck is a single slope wetroom system for timber floors, allowing the linear drain to be positioned neatly against the wall, giving a sleek stylish finish.

See p. 348 for details

Duo Deck - Two way fall for large format tiles

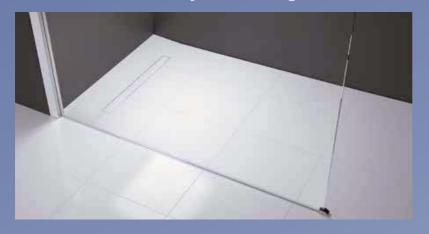


Benefits of the **Duo Deck**

The Duo Deck, with its contemporary linear drain, is perfect for 'large format' tiles, as there are fewer tile cuts required and hence fewer grout lines.

See p. 352 for details

Quattro Deck - Four way fall for mosaic tiles

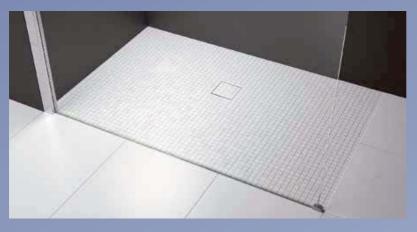

Benefits of the **Quattro Deck**

The Quattro Deck, with its more traditional square drain, is better suited to smaller 'Mosaic' tiles as the tiles blend more sympathetically into the shape of the Deck.

See p. 354 for details

Choosing a layout to suit your room Corner, alcove or wall layout?




Selecting a layout

The layout of your shower room will determine the glass option required. Typically this will be either a Corner, Alcove or Wall Layout. For the Corner Layout we provide a range of options from the minimalist single panel to the complete enclosure. For the Alcove there is a choice of either a minimal screen with pivot or a single door (with a fixed panel if required). For the Wall Layout we provide a choice of fixed screens with optional side panels.

How wide should a screen be?

To keep water within shower area A, a minimum of 100cm is acceptable, but 120cm would be preferable. Your glass choice will also be affected by area B which is the amount of aperture you need to enter the shower area. If space is limited, a Kuadra H2 (p27) screen with pivot offers a smaller fixed panel with enhanced shielding.






1. Corner Layout

For simplicity, select a single glass screen (Kuadra H) but ensure the width of the screen is sufficient to contain the water spray. For more control, choose a screen with a pivot (Kuadra H2) which deflects more water back into the shower area.


Combine screens to form your (Multi-screen) enclosure or choose a Young enclosure to completely contain the water and retain heat within the shower area.



Single glass Kuadra H



Screen with pivot Kuadra H2




Multi-screen Kuadra H with H or H2



Enclosure Young

2. Alcove Layout

Where your shower area is within an alcove, we provide a minimal screen with pivot (Kuadra H2) or a single door (with fixed panel if required) (Young).




Screen with pivot Kuadra H2



Single door (+panel)

3. Wall Layout

Create the feeling of space with a wall layout - perfect for a 'dual' shower. Kuadra Wall features different screen widths along with options for fixed side panels.



Single glass Kuadra Wall



Single glass with panels Kuadra Wall

Timber Floor - Guidelines

The Novellini wetroom for Timber Floors


Introduction

Our range of pre-formed shower Decks has been developed specifically to allow the installation of a level access wetroom on a timber floor.

Available in a range of sizes, the Deck has a pre-formed engineered slope, ensuring that water from the shower is directed towards the integral drain, guaranteeing a perfect gradient every time.

Novellini Wetroom floor systems can be installed with electric underfloor heating (max specification 150watts/ sq metre).

Typical timber floor build-up - Duo Deck

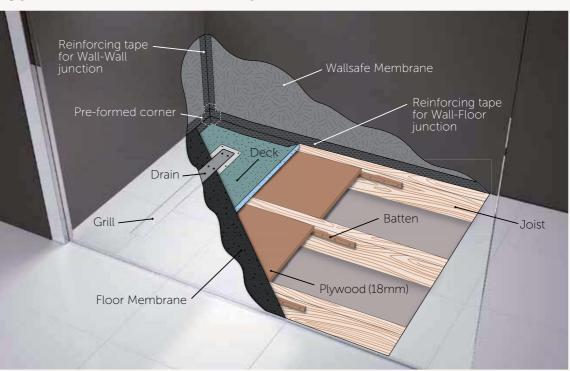

The Drain and Deck are supported by plywood held in place between the floor joists by battens.

The Deck is covered by a self-adhesive waterproof membrane supplied as a Floor Membrane Kit.

The wall is sealed with a waterproof Wall Membrane.

The internal corner of the wetroom is protected using a Pre-formed corner, while the wall-floor horizontal joints and wall-wall vertical joints are sealed with reinforcing tape.



Three simple steps to order your Timber Floor solution



Flow rate up to 68 L/min

Mono Deck One-way fall with linear drain



Flow rate up to 41 L/min

Duo Deck Two-way fall with



Flow rate up to 24 L/min

Quattro Deck Four-way fall with square drain

1 Deck & Drain

The preformed engineered slope on all Decks guarantees a perfect gradient every time.

Choose either the Mono Deck or Duo Deck for large format tiles, or the Quattro Deck for mosaic tiles.

Each Deck features a multi-directional trap for ease of installation.

For Mono and Duo Decks, additional traps can be added to increase the flow rate



Tilesure Floor Membrane Kit



Floorsafe Floor Membrane Kit

2 Floor Membrane Kit

It is essential to ensure your wetroom is correctly waterproofed.

Choose from either a Tilesure or Floorsafe Kit. Both Kits comprise a Floor Membrane, Primer, Pre-formed corners and Reinforcing Tape.



Wallsafe Wall Membrane



Wallsafe **Reinforcing Tape**



Tilesure **Reinforcing Tape**



Floorsafe **Reinforcing Tape**

3 Wall Membrane & Tape

Use Wallsafe to waterproof the walls within and around the shower area.

Use Reinforcing Tape for sealing critical Wall-Wall and Wall-Floor joints.

Ensure the correct Tape is used with the appropriate Floor Membrane Kit.

Mono Deck - How to Specify

Designed for use with large format tiles, Mono Dec is a trimmable wetroom base for timber floors, with a oneway fall towards a linear drain, therefore eliminating the need for diagonal tile cuts.

When choosing the correct kit please take the following into consideration:


- Size of the required shower area
- Position of the drain On the long wall or short wall
- Number of traps 1, 2 or 3
- Finish of the linear grill Type G1 Solid or G3 Stone-Infill
- For grill lengths see Mono Kits on p15

For grill lengths see Mono Kits on p15. Simply choose the nearest kit to the required size of the shower area.

Remember - The width and length can be trimmed on-site to achieve the required size.

Example below shows Kit 8, trimmed to suit a shower area:

- Drainage Component*
- Single Horizontal Trap
- Infill Panel*
- Graded Board*
- G3 Wall Grill
- Stainless Steel Tile Trim
 - * Trimmable on-site

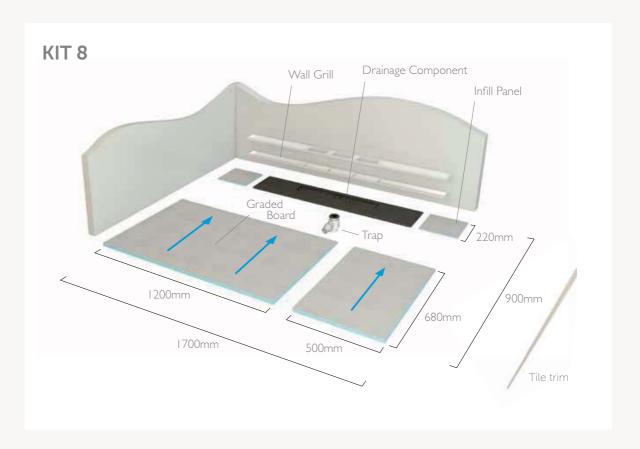



Drainage Component

The Drainage Component is the central element of the Mono Deck System, once in position, the rest of the system is built around it.





- Width can be trimmed on-site
- Available with 1, 2 or 3 wastes
- Single trap up to 24 L/min
- Double trap up to 41 L/min
- Triple trap up to 68 L/min
- 360° Rotatable trap with 42mm outlet
- Trap can be positioned off-center to avoid joists
- Single trap supplied as standard, additional traps can be added as required.

Linear Grill

The Mono Deck is supplied with a Linear Grill, which is neatly positioned against the wall, therefore eliminating the need for angled tile cuts. The grill will be supplied up to 300mm shorter than the overall shower.

i.e. Kit 8 (see p12) has a maximum size of 1800mm x 1000mm with the drain positioned against the long wall, therefore the grill supplied is 1500mm. Simply choose either G1 Solid or G3 Stone Infill.






Graded Board

The Graded Board provides an easy to install one way-fall towards the linear drain. Manufactured from high density XPS, they are trimmable along both dimension A & B, allowing a shower area to be created of almost any size.

- 22mm to 11mm gradient
- Trimmable
- High compressive strength
- Supplied with stainless steel Tile trim
- Fixing washers included

- 11mm thickness





Imber Floor - Mono Deck Guidelines

Timber Floor - Mono Deck

Features of a Mono Deck

The Mono Deck has a single slope one-way fall and can be installed with the linear drain positioned against the long wall or the short wall. The features of a Mono Deck are summarised below:

- Single slope one-way fall
- Create a shower area almost any size
- Easy to install


- Easy to tile using large format tiles
- Lifetime Guarantee

Drain position

Positioning the drain against the wall provides a one-way gradient within the shower, ensuring the user is not standing on the drain. This also omits the need for diagonal tile cuts, giving a more stylish look which is both easier to install and maintain.


Drain against Short Wall

Corner layout




Drain against Long Wall


1. Corner layout



2. Alcove layout



3. Wall layout



Select your Mono Kit and Grill. Add additional trap if required.

Mono Kits



SHORT WALL LAYOUT*	DIMENSION** A	DIMENSION**	GRILL LENGTH G1/G3	PRODUCT CODE	PRICE £ INC VAT
A	1000mm			MONOKIT1 <mark>G1</mark>	
	100011111			MONOKIT1G3	
	1200mm	800 - 1000mm	700mm	MONOKIT2G1	
	120011111			MONOKIT2 <mark>G3</mark>	
	1400mm			MONOKIT3 <mark>G1</mark>	
	1400111111			MONOKIT3 <mark>G3</mark>	
	1700mm	1700		MONOKIT4G1	
	170011111			MONOKIT4 <mark>G3</mark>	

LONG WALL LAYOUT*	DIMENSION** B	DIMENSION**	GRILL LENGTH G1/G3	PRODUCT CODE	PRICE £ INC VAT	
B	1200mm		900mm	MONOKIT5 <mark>G1</mark>		
	1200mm		900mm	MONOKIT5 <mark>G3</mark>		
	1400mm	2	1100mm	MONOKIT6 <mark>G1</mark>		
	1400mm	000 1000	1100mm	MONOKIT6 <mark>G3</mark>		
		800 - 1000mm	600mm 1300mm	1700000	MONOKIT7 <mark>G1</mark>	
	100011111			130011111	MONOKIT7 <mark>G3</mark>	
	1800mm			1500mm	MONOKIT8 <mark>G1</mark>	
	1900mm		1200mm	MONOKIT8G3		

- * See page (opposite) for details of Long and Short Wall Layouts
- ** Dimensions A&B can be cut down to suit your shower space. Other board and drain sizes are available upon request.

Grill options NB Kits with code G1 include a Solid Grill. Kits with code G3 include Stone Infill Grill.



Item:	Solid Grill
Code:	G1



Item:	Stone Infill Grill
Code:	G3

Additional traps (if required)



Item:	Duo Extra*
Code:	DUOWA90
£ (Inc VAT):	
*/horizontal fact	fla tran)



Item:	Duo Optional*
Code:	DUOVT90
£ (Inc VAT):	
*(vertical fast-flo	o trap)


IN STOCK UK (Other products) Please check availability Fimber Floor - Mono Deck prices

CT LUR

 $^{^{\}star}$ All of our wetroom products are covered by the Novellini Product Lifetime Guarantee. Our guarantee is valid only if used with Novellini products and does not cover installation.

Timber Floor - Duo Deck


Duo Deck (with Two-way fall)



The Duo Deck - 2 way fall

Features of a Duo Deck


- Two-way fall suited to large format tiles
- Designed for timber floors
- Lifetime Guarantee
- 22mm depth
- 9 Pre-formed sizes
- Flow rate up to 41 L/min (with two traps)
- Easily trimmed (up to 50mm from any side)
- Supplied with stainless steel Tile Trim



Drain and trap

Features of the drain and trap

- Contemporary linear drain
- Waste position can be varied on-site to avoid joists
- Available with two wastes
- Flow rate up to 41 L/min (with two traps)
- 360° Rotatable trap with 42mm outlet
- Height adjustable grill



Trim detail


Trim detail

Supplied with the Deck, the trim provides a stylish stainless steel finish detailing for the difference in tile heights where the Deck meets the remainder of the wetroom floor.

£ (Inc VAT):



Select your Duo Kit and Grill. Add additional trap if required

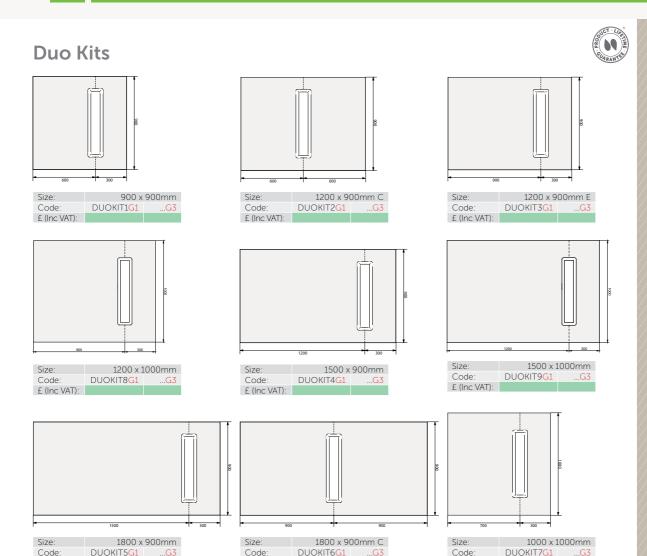

Grill options NB Kits with code G1 include a Solid Grill. Kits with code G3 include Stone Infill Grill.



Additional traps (if required - see flow rate table opposite)

£ (Inc VAT):





£ (Inc VAT):

Item:	Duo Optional*
Code:	DUOVT90
£ (Inc VAT):	




DO NA

^{*} All of our wetroom products are covered by the Novellini Product Lifetime Guarantee. Our guarantee is

Timber Floor - Quattro Deck


Quattro Deck (with Four-way fall)



Quattro Deck

Features of a Quattro Deck

- Four-way fall suited to mosaic tiles
- Designed for timber floors
- Lifetime Guarantee
- 22mm depth
- 8 Pre-formed sizes
- Easily trimmed (up to 50mm from any side)



Quattro Grill, Trap and Drain

Features of the drain and trap


- Traditional square drain
- Flow rate up to 24 L/min
- 360° Rotatable trap with 42mm outlet
- Height adjustable grill

SCT LIANTE


Fimber Floor - Quattro Deck prices

Select your Quattro Kit and Grill option


Quattro Kits




Size:	900 x	900mm
Code:	QKIT1G1	G3
f (Inc VAT):		




Size:	1000 x 1	1000mm
Code:	QKIT2G1	G3
£ (Inc VAT):		




Size:	1200 x 1200m	
Code:	QKIT3G1	G3
£ (Inc VAT):		




Size:	1200 x	900mm
Code:	QKIT4G1	G3
£ (Inc VAT):		





Size:	1200 x 1	1000mm
Code:	QKIT5G1	G3
£ (Inc VAT):	530.40	565.20



Size:	1500 x	900mm
Code:	QKIT6G1	G3
£ (Inc VAT):		







Size:	1800 x	900mm
Code:	QKIT8G1	G3
C (I) (AT)		

Grill options NB Kits with code G1 include a Solid Grill. Kits with code G3 include Stone Infill Grill.



Item: Solid Grill Code:




 * All of our wetroom products are covered by the Novellini Product Lifetime Guarantee. Our guarantee is valid only if used with Novellini products and does not cover installation.



Timber Floor - Waterproofing

A guide to Waterproofing your wetroom



The importance of Waterproofing

The primary concern for anyone choosing to create a Wetroom is whether the floor or walls will either absorb, or worse let water through. Through our painstaking research and development we have created a system that is guaranteed, not just for a few years, but for life. The two components of this system are firstly the floor membrane and secondly the wall membrane, which are the key products for waterproofing the wetroom floor and walls.

We offer two self adhesive waterproof solutions for the floor membrane designed for use prior to the application of ceramic tiles and natural stone onto timber and solid floors in wetrooms:

• Tilesure is an evolution of our popular Tilesafe

membrane which has been the professional's choice for over 15 years in both the commercial and domestic sectors. Developed specifically for use in bathrooms and wetrooms. Tilesure is comprised of a 1.4mm butyl based membrane with a copolymer top layer, which provides an excellent surface for the adhesion of natural stone, porcelain and ceramic tiles. Tilesure is quick and easy to apply, providing a consistent waterproof layer, guaranteed not to leak. Tilesure also acts as a decoupling membrane by uncoupling the floor tiles and accommodating movement in the substrate, within a thickness of only 1.4mm. This omits the requirement for a traditional decoupling mat.

• Floorsafe – developed as a light weight, easy-fit, domestic product, is a cold-applied self-adhesive membrane which consists of a thin rubberised butyl waterproof layer with a fleece top surface.

For walls we recommend Wallsafe:

• A flexible single application paint-on waterproofing membrane, applied to the wall surfaces prior to the application of ceramic tiles and/or natural stone in wetrooms.

Application

For timber floors we recommend that either floor membrane, Tilesure or Floorsafe, is applied to the entire wetroom floor or at least to a distance of no less than 1 metre from the shower area. Wallsafe should then be applied to the walls of the shower area and overlapped onto the Reinforcing Tape.

Floor Membrane Kits



Tilesure 5m² Kit

500ml Primer, 10m Reinforcina Tape 5m x 1m Membrane 290ml Jointing Compound 4 x Pre-formed Corners

Tilesure 10m² Kit

1ltr Primer, 15m Reinforcing Tape 10m x 1m Membrane 290ml Jointing Compound 4 x Pre-formed Corners

Floorsafe 5m² Kit

Tape 5m x 1m Membrane 4 x Pre-formed Corners

Floorsafe 10m² Kit

1ltr Primer, 15m Reinforcing tape 10m x 1m Membrane 290ml Jointing Compound 4 x Pre-formed Corners

Choose from either Tilesure or Floorsafe kits:

Tilesure Kit offers the following features:

- Suitable for timber and solid floors
- Decouples up to 12mm
- Compatible with silicone sealants
- Self-adhesive quick and easy to apply
- · Ready to tile immediately

Floorsafe Kit offers the following features:

- Suitable for timber and solid floors
- Self-adhesive quick and easy to apply
- Ready to tile immediately

ITEM	CODE	£ INC VAT
Tilesure 5m Kit	TSURE5	
Tilesure 10m Kit	TSURE10	
Floorsafe 5m Kit	ВТМК5	
Floorsafe 10m Kit	BTMK10	

Tilesure and Floorsafe are compatible with electric underfloor heating up to 150kw per m²

Additional Reinforcing Tape



Tilesure **Reinforcing Tape**



Floorsafe Reinforcing Tape

A self-adhesive reinforcing tape for use with the floor membrane. Choose either Tilesure or Floorsafe Tape, according to the Floor Membrane Kit selected. Reinforcing Tape is 125mm wide and suitable for all commonly encountered substrates.

ITEM	CODE	£ INC VAT
Tilesure Tape 10m	TAPEU10	
Floorsafe Tape 10m	BTMTAPE10	



JUCT LIFE

CARANTER

Wall Membrane



Wallsafe Membrane



Wallsafe **Reinforcing Tape**

Wallsafe Membrane

- Quick and easy single coat application
- Compatible with Tilesure and Floorsafe
- Solvent free covers up to 8m²
- Suitable for all commonly encountered substrates

Wallsafe Reinforcing Tape


- 75mm Wide x 10m
- Self-adhesieve
- For use in corner wall junctions, vertical joints, soap recesses and other such detail

ITEM	CODE	£ INC VAT
Wallsafe Liquid 8kg	WSAFE8	
Wallsafe Tape 75mm	WSAFET10	

^{*} All of our wetroom products are covered by the Novellini Product Lifetime Guarantee. Our guarantee is

Concrete Floor - Guidelines

The Novellini wetroom for solid floors

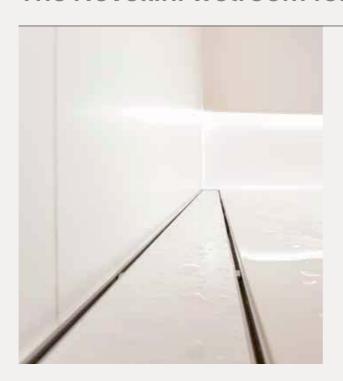

Floor build-up


Our range of linear drains has been developed specifically for concrete or screeded floors and can be used on concrete slabs, planks and block and beam floors.

The key feature of the Linear Floor Drain is its height - the total height from the base to the top of the trough being only 55mm (see image below), making it perfect for today's

The drain incorporates a unique 'waterless trap' which has a lifetime guarantee and has been granted BBA approval. For details see below.

Novellini Wetroom floor systems are suitable to be installed in combination with electric underfloor heating (max specification 150 watts/sq metre).

Typical solid floor build-up

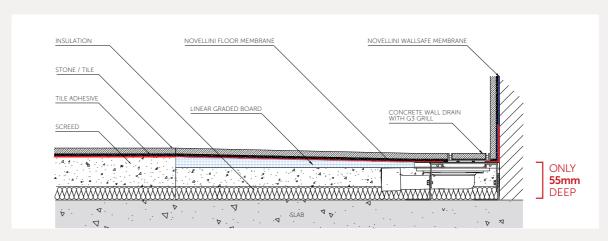

Waterless Trap


All drains are available with one or two traps and a choice of stylish grill finishes. The trap has been specially designed with a spring loaded mechanism which keeps the trap sealed when not in use. This ensures that even when left

unused for prolonged periods the trap cannot dry out, making it ideal for situations where the shower is not in everyday use. The smart design of the linear trough allows the waste position to be rotated through 360° enabling installation in most scenarios with ease.






Four simple steps to order your Concrete Floor solution



24 L/min





Uno4 Drain

Linear Floor Drain Linear Wall Drain







Flow rate up to 56 L/min

Flow rate up to 56 L/min

1 Drain and Grill

The gradient is formed within the screed, typically 12mm from the finished floor level to the drain.

All drains feature a multi-directional outlet

Linear Drains are available with either Single or Double outlet depending on the flow rate required. Linear Drains are available in several lengths.

Choose either

- Uno4 Drain for a four-way fall
- Linear Floor Drain for a two-way fall or
- Linear Wall Drain for a one-way fall





2 Graded Board and Tile Trim

Use the Graded Board to provide a pre-formed consistent gradient towards the drain. For all Linear Drains it is important to order a trim detail to define the edge of the wetroom area.



Screedsure Concrete Floor Membrane Kit

3 Floor Membrane Kit

It is essential to ensure your concrete floor wetroom is correctly waterproofed using a Screedsure Floor Membrane Kit.



Wallsafe Membrane



Wallsafe Reinforcing Tape



Additional **Reinforcing Tape** Screedsure Reinforcing Tape

4 Wall Membrane & Reinforcing Tape

Use Wallsafe on the walls within and around the shower area. Use Reinforcing tape for sealing critical Wall-Wall and Wall-Floor joints.

Concrete Floor - Drain and Grill



Uno4 Drain - 4 way fall

Features of the Uno4 Drain


- Height adjustable drain body
- Horizontal (height 138-255mm) & Vertical (height 55-88mm) trap options
- Flow rate up to 24 L/min
- Height adjustable grill
- Grill size 130mm x 130mm
- Lifetime Homes compatible



Linear Floor Drain - 2 way fall

Features of a Linear Floor Drain

- Height adjustable 55-88mm
- BBA approved
- Lifetime Guarantee
- Waterless trap
- Height adjustable grill
- Easy to clean and replace trap
- Bespoke design available
- Grill width 86mm, grill lengths from 600 2000mm



Linear Wall Drain - 1 way fall

Features of a Linear Wall Drain

- Height adjustable 55-88mm
- BBA approved
- Lifetime Guarantee
- Waterless trap
- Flow rate up to 50 L/min
- Height adjustable grill
- Easy to clean and replace trap
- Bespoke design available
- Grill width 86mm, grill lengths from 600 2000mm



Features of the Drain and Trap

- BBA approved
- Easy to clean and replace trap
- No requirement to top up the trap during long periods of non-use
- No siphoning of the trap due to other appliances
- No chance of smells or gases entering the room
- Available with one or two traps

Select Drain and Grill (see p26 for Linear Wall Drains)



Uno4 Drain



DESCRIPTION	GRILL SIZE	CODE	£ INC VAT
Single trap Uno4 Screed Drain, supplied with solid grill as standard. Maximum flow rate 24 L/min.	130 x 130 mm	UNO4HTG1*	
	130 x 130 mm	UNO4HTG3*	
	130 x 130 mm	UNO4VTG1*	
	130 x 130 mm	UNO4VTG3*	

*NB HT = Horizontal Trap, VT = Vertical Trap

Grill options NB Kits with code G1 include a Solid Grill. Kits with code G3 include Stone Infill Grill.



Item:	Solid Grill
Code:	G1



Linear Floor Drain



DESCRIPTION		GRILL LENGTH	CODE SOLID GRILL	£ INC VAT	CODE INFILL GRILL	£ INC VAT
		600 mm	CD60G1		CD60G3	
Single trap Linear Floor Drain,		700 mm	CD70G1		CD70G3	
supplied with solid grill as standard. Maximum flow rate 29 L/min.		800 mm	CD80G1		CD80G3	
		900 mm	CD90G1		CD90G3	
	1000 mm	CD100G1		CD100G3		
	1100 mm	CD110G1		CD110G3		
	1200 mm	CD120G1		CD120G3		
	1300 mm	CD130G1		CD130G3		
	1400 mm	CD140G1		CD140G3		
		1500 mm	CD150G1		CD150G3	

DESCRIPTION	GRILL LENGTH	CODE SOLID GRILL	£ INC VAT	CODE INFILL GRILL	£ INC VAT
	600 mm	CDDT60G1		CDDT60G3	
Double trap Linear Floor Drain,	700 mm	CDDT70G1		CDDT70G3	
supplied with solid grill as standard. Maximum flow rate 56 L/min.	800 mm	CDDT80G1		CDDT80G3	
	900 mm	CDDT90G1		CDDT90G3	
	1000 mm	CDDT100G1		CDDT100G3	
	1100 mm	CDDT110G1		CDDT110G3	
	1200 mm	CDDT120G1		CDDT120G3	
	1300 mm	CDDT130G1		CDDT130G3	
	1400 mm	CDDT140G1		CDDT140G3	
	1500 mm	CDDT150G1		CDDT150G3	

Please note:

- Additional standard lengths available: 1600, 1700, 1800, 1900, 2000mm.
 Bespoke lengths also available between 600 2000mm on request.
- Please allow 7 days for delivery.
- ${}^{\star}\,\text{All of our wetroom products are covered by the Novellini Product Lifetime Guarantee. Our guarantee is valid only if used with Novellini products and does not cover installation.}$





Linear Wall Drain

DESCRIPTION		GRILL LENGTH	CODE SOLID GRILL	£ INC VAT	CODE INFILL GRILL	£ INC VAT
		600 mm	CWD60G1		CWD60G3	
Single trap Linear Wall Drain,		700 mm	CWD70G1		CWD70G3	
supplied with solid grill as standard. Maximum flow rate 29 L/min		800 mm	CWD80G1		CWD80G3	
		900 mm	CWD90G1		CWD90G3	
	1000 mm	CWD100G1		CWD100G3		
	1100 mm	CWD110G1		CWD110G3		
	1200 mm	CWD120G1		CWD120G3		
	1300 mm	CWD130G1		CWD130G3		
	1400 mm	CWD140G1		CWD140G3		
		1500 mm	CWD150G1		CWD150G3	

DESCRIPTION	GRILL LENGTH	CODE SOLID GRILL	£ INC VAT	CODE INFILL GRILL	£ INC VAT
	600 mm	CWDDT60G1		CWDDT60G3	
Double trap Linear Wall Drain,	700 mm	CWDDT70G1		CWDDT70G3	
supplied with solid grill as standard. Maximum flow rate 56 L/min	800 mm	CWDDT80G1		CWDDT80G3	
	900 mm	CWDDT90G1		CWDDT90G3	
	1000 mm	CWDDT100G1		CWDDT100G3	
	1100 mm	CWDDT110G1		CWDDT110G3	
	1200 mm	CWDDT120G1		CWDDT120G3	
	1300 mm	CWDDT130G1		CWDDT130G3	
	1400 mm	CWDDT140G1		CWDDT140G3	
	1500 mm	CWDDT150G1		CWDDT150G3	

Please note:

- Additional standard lengths available: 1600, 1700, 1800, 1900, 2000mm.
 Bespoke lengths also available between 600 2000mm on request.
 Please allow 7 days for delivery.

Grill options NB Kits with code G1 include a Solid Grill. Kits with code G3 include Stone Infill Grill.



Item:	Solid Grill
Code:	G1
£ (Ex VAT):	Included in kit
£ (Inc VAT):	Included in kit





DIMENSIONS (mm)

300 600 22.80

Linear Graded Board



Tile Strip:

These boards reduce installation time and guarantee the perfect gradient by using the slope of the board rather than screed to create the fall.

	22mm	= I Imm
	В	
A		

Infill Panel

		DIMENSIC)113 (111111)	
ITEM	CODE	А	В	£ INC VAT
Board 1	LINGB300	300	1200	
Board 2	LINGB500	500	1200	
Board 3	LINGB700	700	1200	
Board 4	LINGB800	800	1200	
Board 5	LINGB900	900	1200	
Board 6	LINGB1000	1000	1200	
Board 7	LINGB1100	1100	1200	
Board 8	LINGB1200	1200	1200	
Board 9*	LINGB1500	1500	1200	

LINIP1


*Supplied in two pieces

Select Linear Graded Board and Trim

		Infill Pane
		300mm
-	60)0mm

Infill Panels are used for configurations where the width of the Linear Graded Board exceeds the width of the drain. Infil panels come in a standard 300 x 600mm format, but can be trimmed to suit your installation.


Linear Floor Drain Trim detail (Two-way fall)



ITEM	CODE	DIMENSIONS	£ INC VAT
Tile strip 1	NWFSS1	300/600mm	
Tile strip 2	NWFSS2	600/600mm	
Tile strip 3	NWFSS3	300/900mm	
Tile strip 4	NWFSS4	300/1200mm	
Tile strip 5	NWFSS5	300/1500mm	
Tile strip 6	NWFSS6	900/900mm	
Tile strip 7	NWFSS7	300/700mm	

Supplied separately, the trim provides a stylish stainless steel finish detailing the difference in tile heights where the sloping wetroom floor meets the flat wetroom floor.

Linear Wall Drain Trim detail (One-way fall)




ITEM	CODE	DIMENSIONS	£ INC VAT
Tile strip 1	LINTT500	12 x 800mm	
Tile strip 2	LINTT700	12 x 1000mm	
Tile strip 3	LINTT800	12 x 1100mm	
Tile strip 4	LINTT900	12 x 1200mm	
Tile strip 5	LINTT1000	12 x 1300mm	
Tile strip 6	LINTT1100	12 x 1400mm	
Tile strip 7	LINTT1200	12 x 1500mm	
Tile strip 8	LINTT1500	12 x 1800mm	

^{*} All of our wetroom products are covered by the Novellini Product Lifetime Guarantee. Our guarantee is



Concrete Floor - Waterproofing

A guide to Waterproofing your wetroom

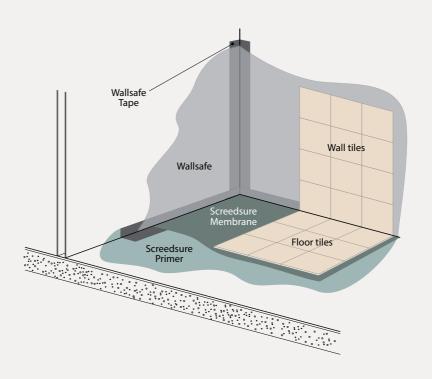

The importance of Waterproofing

The primary concern for anyone choosing to create a wetroom is whether the floor or walls will either absorb, or worse let water through.

Through our painstaking research and development we have created a system that is guaranteed, not just for a few years, but for life.

The two components of this system are Screedsure and Wallsafe - products for waterproofing the wetroom floor and walls.

Screedsure is a copolymer self-adhesive waterproofing membrane specifically designed for use onto screeded and other solid floors in wetrooms and bathrooms.

Screedsure is comprised of a 1mm butyl based membrane, with a fabric top layer, providing an excellent surface for the adhesion of natural stone, porcelain and ceramic tiles.

Screedsure is quick and easy to apply, providing a consistent waterproof layer, guaranteed not to leak.

For walls we recommend Wallsafe:

A flexible single application paint-on waterproofing membrane, applied to the wall surfaces prior to the application of ceramic tiles and/or natural stone in wetrooms

Application

For solid floors we recommend that the Screedsure membrane is applied to the shower area plus an additional one metre in either direction.

Wallsafe should then be applied to the walls of the shower area and overlapped onto the Reinforcing Tape.

UCT LIAM

DQ NA

CARANTER

Floor Membrane Kit



- Suitable for solid floors only
- Self-adhesive quick and easy to apply
- Ready to tile immediately
- Ideal for fast track construction
- Supplied as a kit
- Factory controlled thickness
- Compatible with electric underfloor heating up to 150kw per m²

Screedsure 5m² Kit

500ml Primer, 10m Reinforcing tape, 5m x 1m Membrane, 290ml Jointing Compound

Screedsure 10m² Kit

1ltr Primer, 15m Reinforcing tape, 10m x 1m Membrane, 290ml Jointing Compound 4 x Pre-formed corners


ITEM	CODE	PRICE £ INC VAT
5m Roll + Ancillaries	SSURE5	
10m Roll + Ancillaries	SSURE10	

Additional Reinforcing Tape



Screedsure Reinforcing Tape

A self-adhesive reinforcing tape for use with Screedsure. Reinforcing tape is 125mm wide.



Wall Membrane



Wallsafe Wall Membrane



Wallsafe **Reinforcing Tape**

Wallsafe Membrane

- Quick and easy single coat application
- Compatible with Tilesure and Floorsafe
- Solvent free covers up to 8m²
- Suitable for all commonly encountered substrates

Wallsafe Reinforcing Tape

- 75mm wide x 10m
- · Self-adhesive
- For use in corner wall junctions, vertical joints, soap recesses and other such detail

ITEM	CODE	£ INC VAT
Wallsafe Liquid 8kg	WSAFE8	
Wallsafe Tape 75mm	WSAFET10	

^{*} All of our wetroom products are covered by the Novellini Product Lifetime Guarantee. Our guarantee is





Concrete Floor - Waterproofing prices