


Nivano CTe

Pre installation requirements

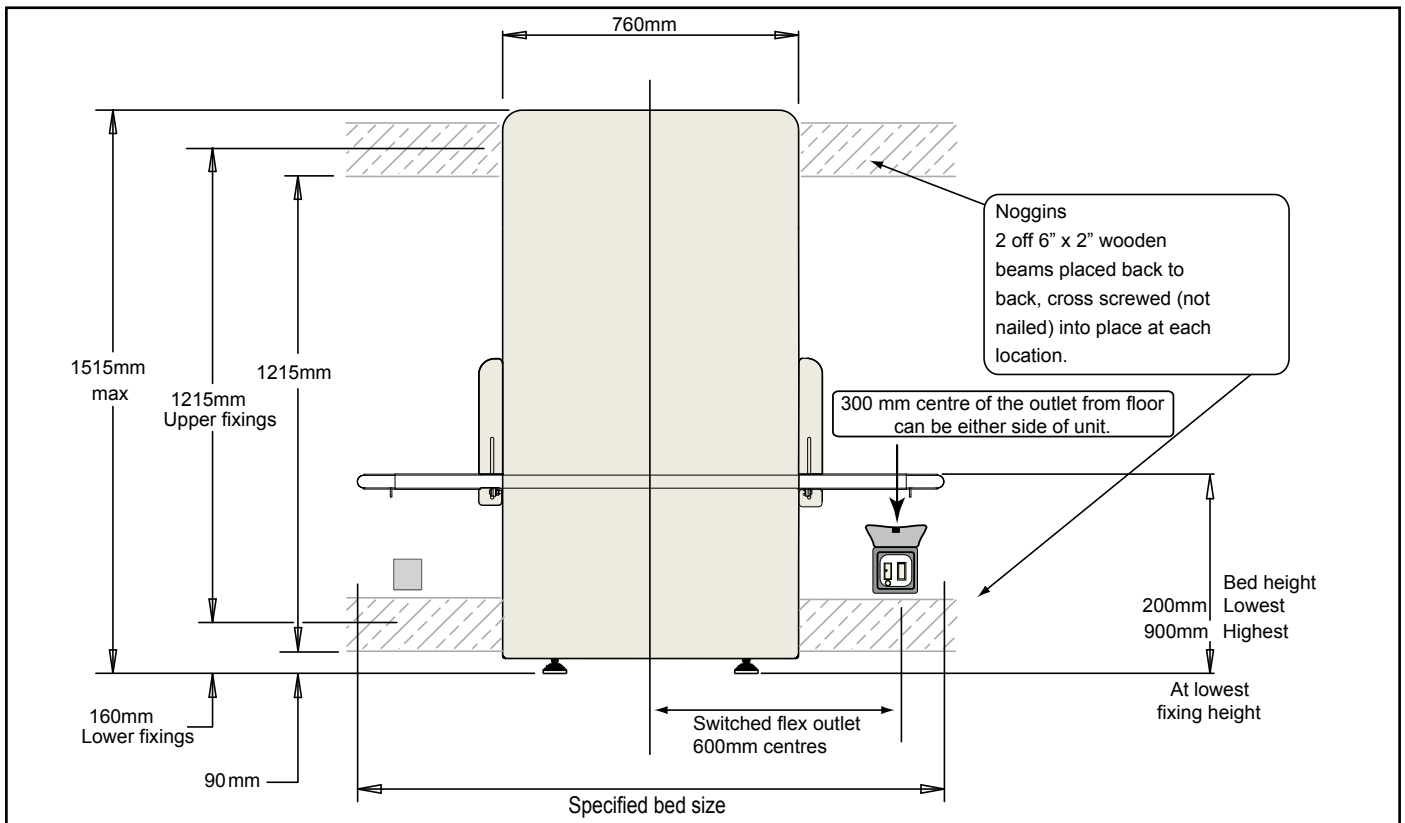

All wall and floor decoration must be complete prior to installation.

Electrics

A 230 volt 1.25kW Waterproof switched flex outlet must be provided in the specified position shown, supplied from a protected fused spur.

Fixing

The changing table fixes to the wall and can rest on the floor or be wholly supported by the wall. The wall must be load bearing and strong enough to bear a load of 100 kgs on each of the wall fixings. The wall must be flat and free from obstructions of floor level to 1550mm above the floor. There should be a minimum clearance of 40mm at each end of the bed.

If the changing table is to be mounted on a stud wall it will need special reinforcement, either

1. Noggins fixed into the wall as shown.
2. Marine or exterior plywood 25mm (MINIMUM), secured every 200mm, should be used to cover the entire area 1550mm high and as long as the specified bed length, equal about the centreline. It must be in contact with and supported by the floor.

This unit CANNOT be fitted to metal frame or similar type stud wall unless it has been fully reinforced with timber struts that are secured top and bottom and then reinforced with noggins or 25mm plywood fitted as per our specification.

Nivano CTe Pre installation checksheet



Please read and check the sections below before ticking each box

THIS SHEET MUST BE COMPLETED AND RETURNED BEFORE INSTALLATION CAN TAKE PLACE

Wall The wall is LOAD BEARING and free of obstructions from floor level to a height of 1550mm. OR The wall is a stud wall, but strengthened to Astor Bannerman specification and free from obstructions from floor level to a height of 1550mm.	<input type="checkbox"/> <input type="checkbox"/>
---	--

Floor 1. The floor is finished ready for the unit to be installed on the floor. 2. The floor is of concrete/wooden construction (delete as appropriate).	<input type="checkbox"/> <input type="checkbox"/>
---	--

Electrics 1. A 230 volt 1.25kW Waterproof switched flex outlet, located as shown overleaf, supplied from a protected fused spur is required and operational.	<input type="checkbox"/>
--	--------------------------

Access 1. The unit is not required to be installed upstairs/through difficult access Or 2. The unit is required to be installed upstairs/through difficult access but necessary arrangements have been made to assist the Astor-Bannerman engineer.	<input type="checkbox"/> <input type="checkbox"/>
---	--

Important We confirm that 230 Volt mains power supply (not temporary supply), will be connected and operational BEFORE the Astor-Bannerman engineer visits.	<input type="checkbox"/>
---	--------------------------

This last box must be ticked before we are able to release the goods for installation. We understand that if the above works are not complete, any on site waiting time will be charged to us at £80 per hour and should the site require a second visit due to the above requirements not being met a second additional installation charge will be made and we agree to pay those charges.	<input type="checkbox"/>
--	--------------------------

Signed Date
Print name Job number
Site address